



Type PI 200

2-way solenoid valve
direct actuated, bistable



Application

Neutral liquids, gases and vapors



Type/ Order No.	Orifice [mm]	Port size	Pressure range [bar] AC DC	kv-value [m³/h]	Weight [kg]
PI 200-001	0,8	Flange	0 - 8	0,02	0,045
PI 200-002	1,0	Flange	0 - 6	0,03	0,045
PI 200-003	1,2	Flange	0 - 4	0,04	0,045
PI 200-004	1,6	Flange	0 - 2	0,05	0,045

Sealing material: **P** (NBR) **E** (EPDM) **V** (FPM)

Body material:	POM
Inner parts:	Stainless steel (1.4105)
Mounting direction:	Free, preferred upwards
Max. ambient temp.:	50 °C
Viscosity of the medium:	max. 21 mm ² /s (3 °E)
Static pressure:	max. 10 bar
Standard voltage:	DC: 24 V, 12 V, 9 V, 6 V



Power consumption: 2,5 W
Pulse duration: 30 ms
Voltage tolerance: -15%... +10%
Operating frequency: max. 300/min
Degree of Protection: IP 54 (EN 60529)

314



Other configurations upon request

The right to modification is reserved

mounting diagram



o-ring 2,5x1
o-ring 5x1
included

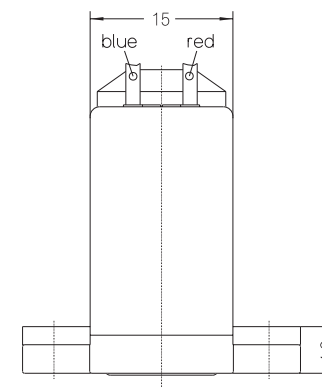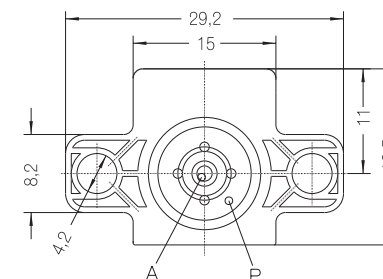

Dimensions in mm

315