
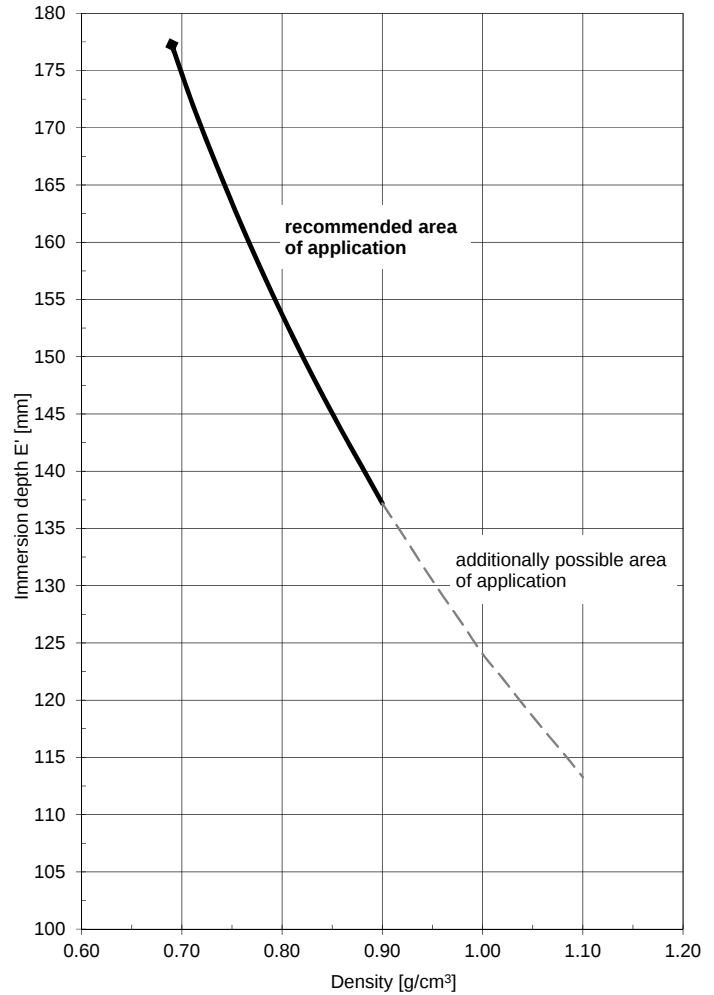


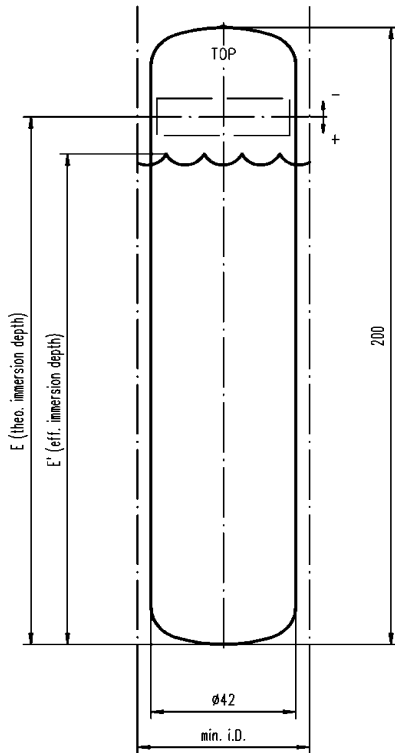


order reference

36223/20

technical details

material	316L
max. operating pressure ^{*1)}	20 bar@20 °C
max. test pressure ^{*1)}	20 bar@20 °C
min. density	0.69 g/cm³
pipe min. ID	48/50 mm
theo. immersion depth E	177.2mm =with density 0.69g/cm³
	174.8mm =with density 0.70g/cm³
	163.5mm =with density 0.75g/cm³
	153.6mm =with density 0.80g/cm³

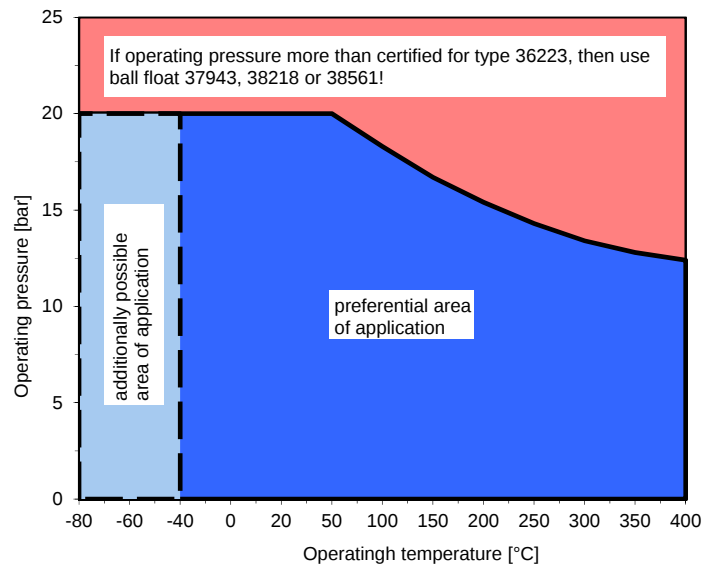

eff. Eintauchtiefe E'

siehe Diagramm

Erläuterungen

^{*1)} entspricht max. Arbeits- und Prüfdruck in bar