


Catalogue No: CA7-12E-10-24VDC

CONTACTOR 5.5kW 3P 24V DC COIL 1NO AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7
Contactors 4 to 55kW > 3 Pole Contactors with DC Coil

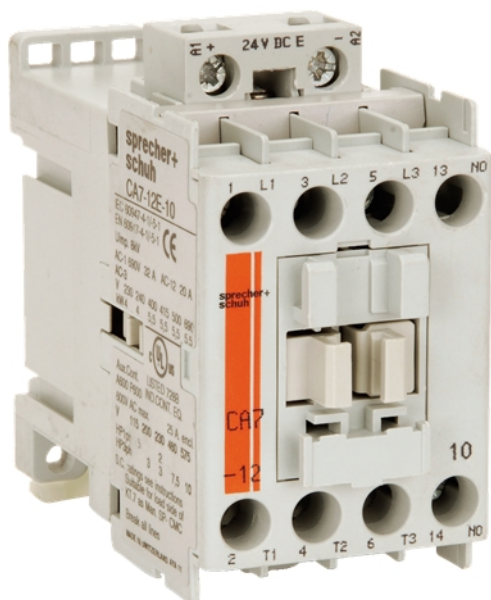

Representative Photo Only
(actual product may vary based on configuration selections)

Contactor 3 pole 12A 5.5kW 1N/O Auxiliary 24V DC Electronic Coil

- Available in AC or DC coil versions to suit your application requirements
- Common accessories across CA7 contactors simplifies inventory requirements and maximises usability
- Reversible (line or load side) coil terminations provides total flexibility
- DIN rail mountable for easy installation

SPECIFICATIONS

Product Series	CA7-12
Component Type Motor Control and Drives	Standard Contactor
Ie, Rated Operational Current, AC-1, 415V, 40°C	32 A@415V,40°C
kW Rating, AC-3, 415V, 60°C	5.5 kW @415V, 60°C
Ie, Rated Operational Current, AC-3, 415V, 60°C	12 A@415V,60°C
kW Rating, AC-3, 690V, 60°C	5.5 kW @690V, 60°C
Ie, Rated Operational Current, AC-3, 690V, 60°C	7 A@690V,60°C
Number of Poles	3
Contact Configuration, Main Poles	3 NO main poles
Contact Configuration, Auxiliary	1 NO auxiliary
Coil Type	Electronic type
Integrated Aux	1 N/O
Coil Voltage, DC, Nom	24 V DC
IP Rating	IP20


REFERENCES

IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

Catalogue No: **CA7-12E-10-24VDC**


CONTACTOR 5.5kW 3P 24V DC COIL 1NO AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7
Contactors 4 to 55kW > 3 Pole Contactors with DC Coil

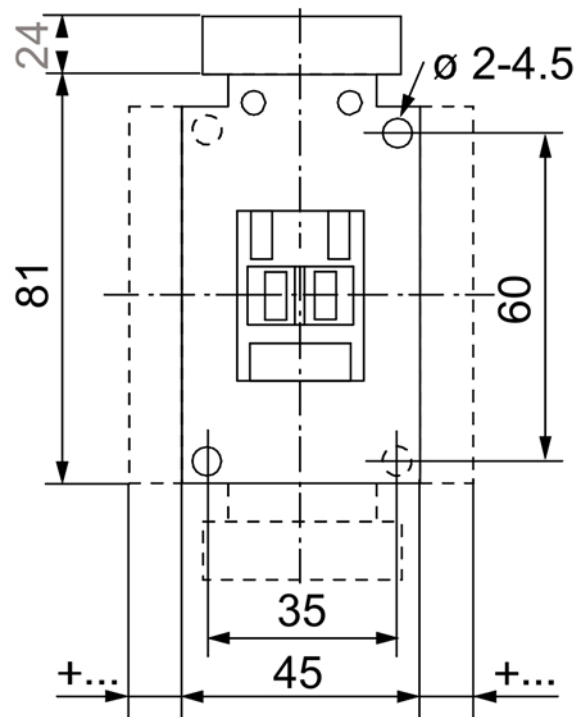


Dimension Diagram

OPTION A

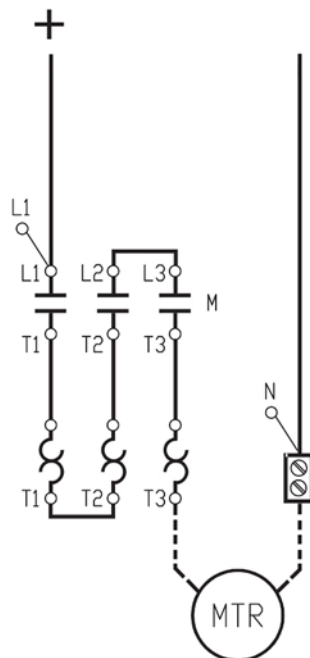

OPTION B

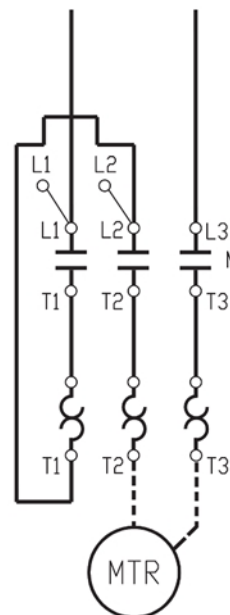

Connection / Wiring Diagram


Catalogue No: **CA7-12E-10-24VDC**

CONTACTOR 5.5kW 3P 24V DC COIL 1NO AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7
Contactors 4 to 55kW > 3 Pole Contactors with DC Coil



Mounting Position

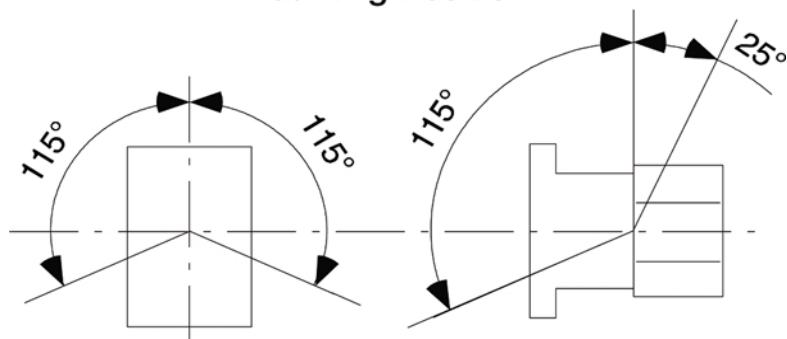

Technical Diagram